



# IMD 300 Series

## Ice Maker Dispenser

### Features

- CFC-free, R-404a refrigerant
- CFC-free foam insulation
- Produces extruded, chewable ice preferred by consumers
- Patented design – easy to perform preventative maintenance
- Ice maker uses 100% of water
- Ideal for healthcare or foodservice applications
- Standard ice and water dispensing
- Removable, easy-to-clean air filters
- Cube size 3/8" W x 1/2" H x 1/2" D



IMD 300-15 Ice Maker Dispenser



IMD 300-30 Ice Maker Dispenser






Technical Specifications:

Model No.	Ice Storage Capacity	Ice Production Capacity (60 cycle)	Electrical Rating	Shipping Weight
IMD-300-15ASPB	13 lb (5.9 kg)	246 lb per day @ 70°F air/50°F water 112 kg @ 21°C air/10°C water	115V/60 Hz/15 amps	178 lb (81 kg)
IMD-302-15ASPB	13 lb (5.9 kg)	202 lb per day @ 90°F Air/70°F water 92 kg @ 32°C air/21°C water	220-240V/50 Hz/15 amps	178 lb (81 kg)
IMD-300-30ASLA	30 lb (14 kg)	360 lb per day @ 70°F air/50°F water 163 kg @ 21°C air/10°C water	115V/60 Hz/15 amps	235 lb (107 kg)
IMD-300-30ASPB	30 lb (14 kg)	360 lb per day @ 70°F air/50°F water 163 kg @ 21°C air/10°C water	115V/60 Hz/15 amps	235 lb (107 kg)
IMD-302-30ASLA	30 lb (14 kg)	300 lb per day @ 90°F air/70°F water 136 kg @ 32°C air/21°C water	220-240V/50 Hz/15 amps	235 lb (107 kg)
IMD-302-30ASPB	30 lb (14 kg)	300 lb per day @ 90°F air/70°F water 136 kg @ 32°C air/21°C water	220-240V/50 Hz/15 amps	235 lb (107 kg)



ICE MAKING CAPACITIES

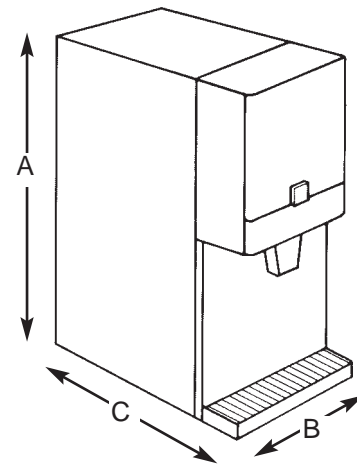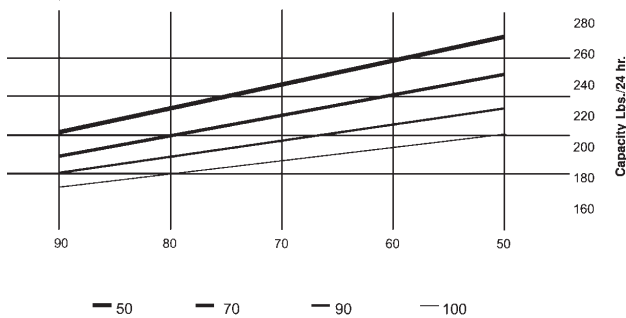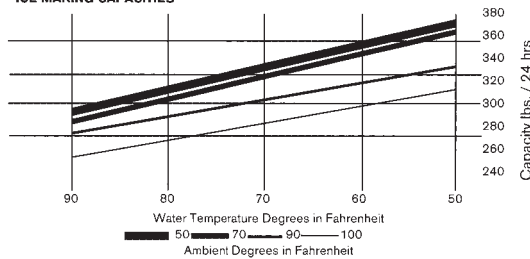

Dimensions

	A	B	C
IMD 300-15	35" (89 cm)	15" (38 cm)	24" (61 cm)
IMD 300-30	35.75" (91 cm)	18.62" (47 cm)	27.50" (70 cm)

Note: If legs are installed, height increases 4" (10 cm).

Part No.	Description
638090701	IMD 300-15ASPB Push Button Ice Maker Dispenser
638090703	IMD 302-15ASPB Push Button Ice Maker Dispenser
638090500	IMD 300-30ASLA Lever Ice Maker Dispenser
638090501	IMD 300-30ASPB Push Button Ice Maker Dispenser
638090502	IMD 302-30ASLA Lever Ice Maker Dispenser
638090503	IMD 302-30ASPB Push Button Ice Maker Dispenser



For more information or to place an order, contact your sales representative or authorized distributor.

**In the US:**  
 Phone: 1-800-238-3600  
 Fax: 1-800-535-4235  
**Outside the US:**  
 Phone: 1-763-421-6120  
 Fax: 1-763-422-3297